


CP-10HD Stationary Horizontal Compactor

Specifications

Manufacturer's Rated Size	10 Cubic Yards
Rated Size	9.79 Cubic Yards
Cycle Time	36 Seconds
Capacity Per Hour	979 Yards
Clear Top Opening (L x W)	118 1/2" x 79"
Ram Face Dimensions (W x H)	78 3/4" x 48"
Ram Penetration	34 1/2"
Cylinder Bore, Rod & Stroke	10" x 7" x 155"
Operating Pressure	
Normal	1850 PSI
Maximum	2000 PSI
Ram Force Rating	
Normal	38.44 PSI / 145,299 Lbs
Maximum	41.56 PSI / 157,080 Lbs
Motor (HP)	60 HP
Pump (GPM)	135 GPM
Tank Capacity	300 Gallons
Shipping Weight	35,000 Lbs (approx)
Construction	
Frame	
Floor Plates	1/2" A-36 w/ 1/2" AR 450 Wear P late
Floor Plate Supports	6"- 10.5 Lb Channel
Side Plates	1/2" A-36 w/ 1/2" AR 450 Wear P late
Side Reinforcements	6"x3"x 1/4" Tube
Breaker Bar	2" Plate
Ram Hold Down Bars	1 1/2" x 1 1/2" Bar
Load Binder Hook-Up	165,000 Lbs Capacity
Ram	
Face Plate	1 1/4"
Floor Plates	1/2" A-36 w/ 1/2" AR 450 Wear P late
Side Plates	1/2"
Top Plate	1/2"
Top Plate Reinforcement	6"- 10.5 Lb Channel

All Specifications are subject to change without notice.

Installation Requirements



Minimum Recommended Requirements:

- Concrete Pad: 10' x 28' (May be made larger to suit)
4,000 PSI Reinforced, 8" Thick
- (24) 1" x 6" Anchor Bolts

Minimum Clearance Requirements:

- 36" From Back of Compactor to Wall
- 48" From Right & Left of Compactor to Wall

Electrical Disconnect Requirements


60 HP Motor		
Voltage	Amperage	Fuse
208	300	250
240	250	200
480	100	100

Available Options

- Hoppers & Enclosures - Any Configuration
- Hydraulic Coupler
- Compactor Stand
- Low Oil Indicator/Shut Down
- Remote Start
- Power Unit Cover
- Oil Heater
- Oil Cooler

All Compactors can be Customized to Accommodate Any Clear Top Opening

Illustration for reference only

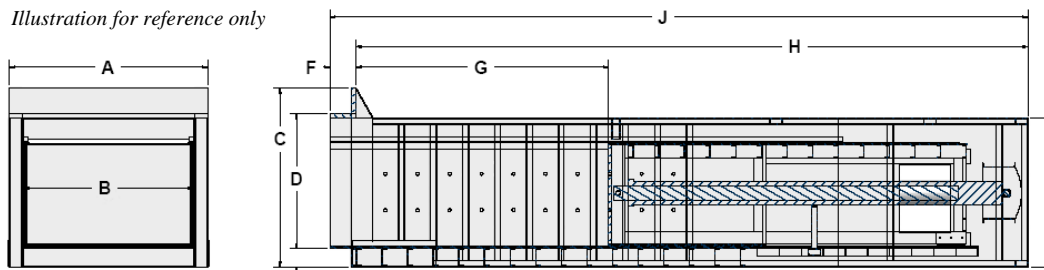

A	B	C	D	E	F	G	H	I	J	Capacity
93"	79"	83 1/2"	63"	8 1/2"	12"	118 1/2"	315"	69 11/16"	327"	10 Yards



Distributor

385 Sumpter Road • Belleville • MI 48111-2932 • Phone (734) 699-5561 • Fax (734) 699-0360
P.O. Box 68 • Belleville • MI 48112-0068
On the Web at: <http://www.contractwelding.com>

02/09 REV3