

Roll-Off Containers *Heavy Duty*

20 to 90 -Yard Capacity

| Specifications | | |
|---------------------------|--------------------------|---|
| Manufacturer's Rated Size | Shipping Weight (approx) | |
| 20 Cubic Yards | 6,300 Lbs | |
| 25 Cubic Yards | 6,750 Lbs | |
| 30 Cubic Yards | 7,200 Lbs | |
| 40 Cubic Yards | 9,480 Lbs | |
| 50 Cubic Yards | 11,500 Lbs | |
| 60 Cubic Yards | 14,260 Lbs | |
| 70 Cubic Yards | 16,500 Lbs | |
| 80 Cubic Yards | 18,400 Lbs | |
| 90 Cubic Yards | 20,250 Lbs | |
| Construction | Heavy Duty | |
| Sides | Side Walls | 3/16" Plate |
| | Top Rails | 4" x 4" x 3/16" Tube |
| | Side Supports | 3/16" Formed Channel 24" Centers |
| | Rear Corner Posts | 1/4" Formed Channel |
| Floor | Long Rails | 6" x 2" x 5/16" Tube |
| | Rail End Inserts | 1 1/2" Plate |
| | Floor Plate | 1/4" Plate |
| | Floor Reinforcement | 3"- 4.1 # Structural Channel 12" Centers |
| | Hook Plate | 1" Plate |
| | Hook | 2" Plate |
| | Rollers | 3 1/2" O.D. x 6" Wide |
| | Roller Arms | 1" Plate |
| | Wheels | 10 3/4" O.D. x 8" Wide |
| | Axles | 1 7/8" O.D. with Grease Fittings |
| Front | Wheel Brackets | 3/8" Plate |
| | Wall | 3/16" Plate |
| | Reinforcement | 3/16" Formed Channel |
| Door | Bumper Pad | 3/8" x 24" x 36" Formed |
| | Wall | 3/16" Plate |
| | Frame | 4" x 4" x 1/4" Tube |
| | Supports | 2 - 3/16" Formed Channel |

Standard Features

- Grease Fittings on All Hinges & **Both** Sides of All Axles
- Door Guides
- Single Handled Latch Lever Bar
- Tarp Hold Downs

Available Options

- Neoprene Door Seals
- Custom Latch Systems
- Top Hinged "Dump Style" Door
- Custom Top Covers
- Customization Available
- 1/2" x 2" Rail Wear Strips
- 6" x 2" x 3/8" Rails

| Model | A | B | C | D | E | F | Capacity |
|-------|------------|-----|------|-----|------|---------|----------|
| RO-20 | 23' 6 1/2" | 22' | 56" | 44" | 96" | 85 1/2" | 20 Yards |
| RO-25 | 23' 6 1/2" | 22' | 66" | 54" | 96" | 85 1/2" | 25 Yards |
| RO-30 | 23' 6 1/2" | 22' | 76" | 64" | 96" | 85 1/2" | 30 Yards |
| RO-40 | 23' 6 1/2" | 22' | 96" | 84" | 96" | 85 1/2" | 40 Yards |
| RO-50 | 29' 6" | 28' | 96" | 84" | 96" | 85 1/2" | 50 Yards |
| RO-60 | 35' 6" | 34' | 96" | 84" | 96" | 85 1/2" | 60 Yards |
| RO-70 | 39' 6" | 38' | 96" | 84" | 96" | 85 1/2" | 70 Yards |
| RO-80 | 39' 6" | 38' | 102" | 90" | 102" | 91" | 80 Yards |
| RO-90 | 44' 6" | 43' | 102" | 90" | 102" | 91" | 90 Yards |

All Specifications are subject to change without notice.





Illustration for reference only

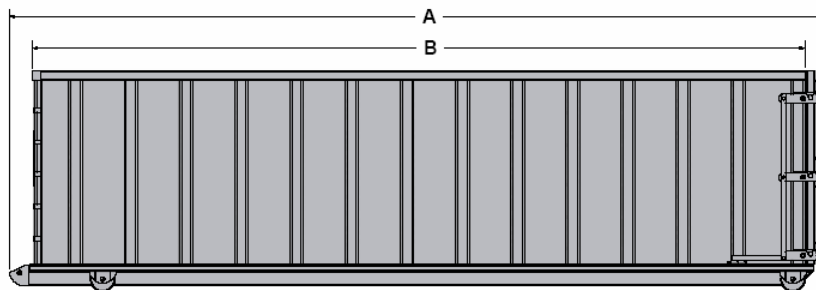

Distributor

385 Sumpter Road • Belleville • MI 48111-2932 • Phone (734) 699-5561 • Fax (734) 699-0360
 P.O. Box 68 • Belleville • MI 48112-0068
 On the Web at: <http://www.contractwelding.com>

02/07 REV1